



FIC-FTTH


FIC-23 Field Installation Connector




Model No.	FIC-23
Insertion loss	≤0.30dB Max 0.5dB
Return loss	APC≥55dB UPC≥50dB
Tensile	ΔIL < 0.3dB @ 40N
Durability	> 500 times
Re-assembly	> 5 times
Cable scope	2.0mmX3.0mm Drop Cable
Humidity	≤ 95%
Operating temperature	-25-85°C
Atmospheric Pressure	70-106Kpa

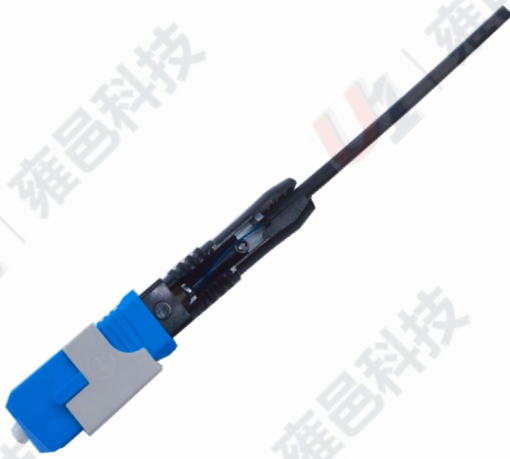

No need for embedded fiber,
directly connected to the site



Special dust cap, which can press the fiber to make sure the microbend.



The end face is curved, reflecting light to a point



Threaded tail sleeve design, easy to install



High quality ceramic ferrule

SHENZHEN U1
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,
Changxing Hi-tech Industrial Park,
Shajing Street, Baoan District,
Shenzhen China 518104

CALL: +86 0755 - 2667 3886

Tel:+86 0755-2667 3886
Fax:+86 0755-2682 1069
Web: www.u1conec.com
E-mail: admin@u1conec.com