



FIC-FTTH

FIC-02 Field Installation Connector

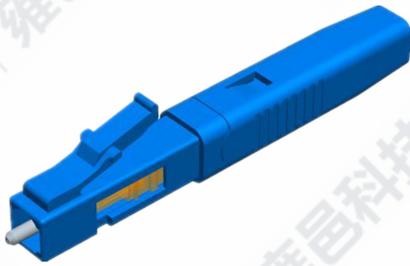

Model No.	FIC-02
Insertion loss	≤0.30dB Max 0.5dB
Return loss	≥50dB
Tensile	ΔIL < 0.3dB @ 20N
Durability	> 500 times
Re-assembly	> 5 times
Cable scope	2.0mmX1.6mm Cable
Humidity	≤ 95%
Operating temperature	-25-85°C
Atmospheric Pressure	70-106Kpa




Provide the optical fiber micro-bending tolerance



Three functions in 1 tool.
1. open the housing
2. measuring the fiber
3. stripping the fiber



Compact size.Massively used in 5G

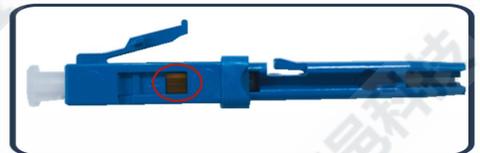

Offering a window where you can see the bending of fiber

SHENZHEN U1
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,
Changxing Hi-tech Industrial Park,
Shajing Street, Baoan District,
Shenzhen China 518104

CALL: +86 0755 - 2667 3886

Tel:+86 0755-2667 3886
Fax:+86 0755-2682 1069
Web: www.u1conec.com
E-mail: admin@u1conec.com