




# CABLE-FTTH

GYTS Optical Fiber Cable

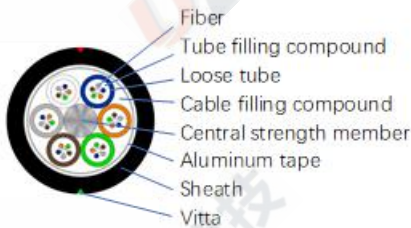


Model NO.	GYTS
Fiber type	G652
Sheath color	Black
Sheath material	PE
Cable dimension (mm)	9.5-13.5, Tolerance±0.1
Cable weight (Kg/km)	116-280
Min. bending radius (mm)	30 (Static) 15(Dynamic)
Attenuation (dB/km)	≤ 0.4 at 1310nm ≤ 0.3 at 1550nm



- 1 Double-jacket structure make cable have nice properties of moisture resistance and crush resistance.



- 1 With small cable diameter, light cable weight, easily to lay
- 2 Can directly buried underground.



- 1 Steel tape armored, excellent anti-crush properties.
- 2 Good anti-bullet properties.

**SHENZHEN U1**  
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,  
Changxing Hi-tech Industrial Park,  
Shajing Street, Baoan District,  
Shenzhen China 518104

**CALL: +86 0755 - 2667 3886**

Tel:+86 0755-2667 3886  
Fax:+86 0755-2682 1069  
Web: www.u1conec.com  
E-mail: admin@u1conec.com