


CABLE-FTTH

GJFJPH Optical Fiber Cable



| | |
|--------------------------|------------------------------------|
| Model NO. | GJFJPH |
| Fiber type | G657 |
| Sheath color | Yellow, Orange or Aqua |
| Sheath material | LSZH/PVC |
| Cable dimension (mm) | 4.2-8.5, Tolerance±0.1 |
| Cable weight (Kg/km) | 12.4-65 |
| Min. bending radius (mm) | 20 (Static) 10(Dynamic) |
| Attenuation (dB/km) | ≤ 0.4 at 1310nm ≤ 0.3 at 1550nm |

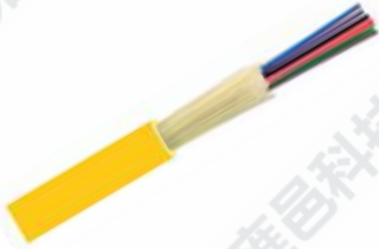

- 1 Tight buffer fiber with single strength member
- 2 Each sub cable contains aramid yarn, good bend performance



- 1 Standard core can be directly apply to connectors, to use for device connecting.



- 1 Tight buffer layer, protect fiber from damage, and easy splicing.
- 2 Good bending performance.

SHENZHEN U1
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,
Changxing Hi-tech Industrial Park,
Shajing Street, Baoan District,
Shenzhen China 518104

CALL: +86 0755 - 2667 3886

Tel:+86 0755-2667 3886
Fax:+86 0755-2682 1069
Web: www.u1conec.com
E-mail: admin@u1conec.com