



# CABLE-FTTH

GJYXFH Optical Fiber Cable

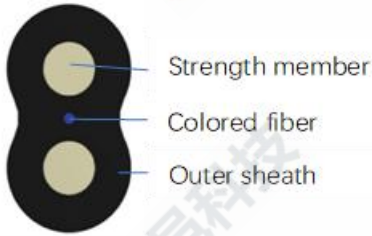

Model NO.	GJYXFH
Fiber type	9/125(G657A1/G657A2)
Sheath color	Black/White/Grey
Sheath material	LSZH/PVC
Cable dimension (mm)	5.0*3.0, Tolerance±0.1
Cable weight (Kg/km)	14.6
Min. bending radius (mm)	15 (Static) 30 (Dynamic)
Attenuation (dB/km)	≤ 0.4 at 1310nm ≤ 0.3 at 1550nm

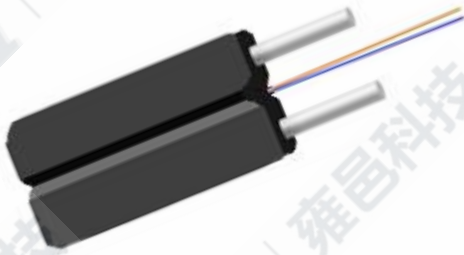

- 1 Groove design, easily strip and splice.
- 2 Simplified installation and maintenance.
- 3 Higher tensile strength.



- 1 Suitable for all kinds of connectors
- 2 Can make patchcord and pigtail.



- 1 Used in indoor cabling, especially used for FTTH.
- 2 Used as access building cable.

**SHENZHEN U1**  
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,  
Changxing Hi-tech Industrial Park,  
Shajing Street, Baoan District,  
Shenzhen China 518104

**CALL: +86 0755 - 2667 3886**

Tel:+86 0755-2667 3886  
Fax:+86 0755-2682 1069  
Web: www.u1conec.com  
E-mail: admin@u1conec.com